





ThEMIS COMBAT

WITH EM&E ASPIS



ThEMIS Combat UGVs provide commanders the ability to enter high-threat situations to identify and engage known or perceived threats prior to human intervention. By destroying the first patch of enemy key assets and creating a hole in the enemy's defensive or offensive posture, ThEMIS Combat UGVs enhance the effectiveness of manned assets by creating momentum that human troops can leverage with fewer casualties.

THeMIS COMBAT USECASES

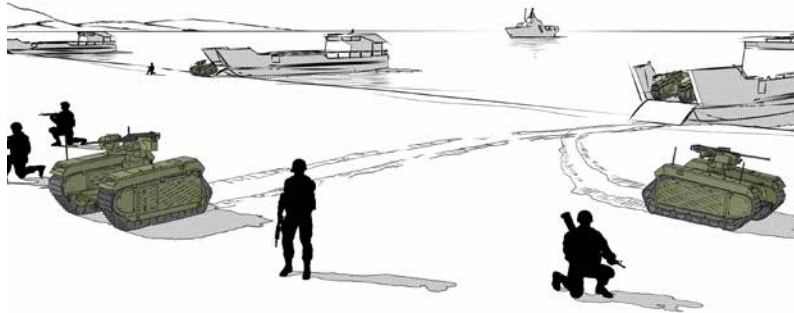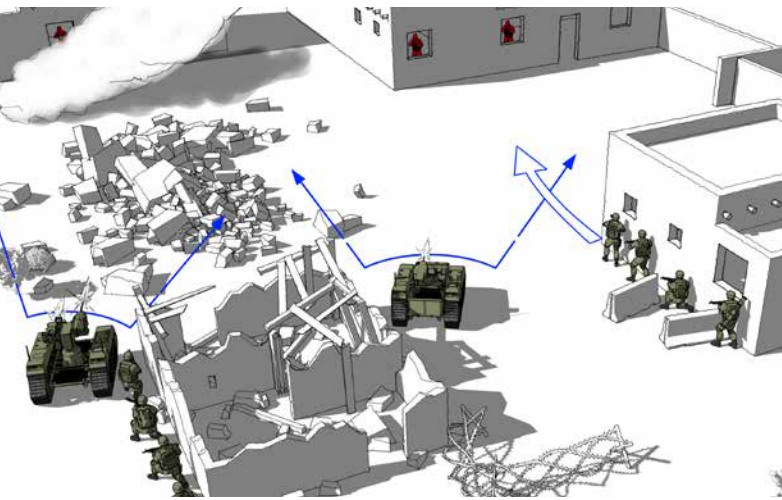

TECHNICAL SPECIFICATIONS

MOBILITY

Dimensions	240 cm x 205 cm x 150 cm
Combat weight	2400 kg
Max. speed	20 km/h
Ground clearance	Up to 60 cm
Max. grade	31 deg / 60 %
Fording depth	60 cm
Pull force	15 000 N
Run time (hybrid, full internal tank)	up to 15 h
Run time (full load, silent mode)	up to 1.5 h
Line of sight control range	up to 2 km
Turning radius	0 m

LETHALITY ASPIS

Main armament	5.56 or 7.62mm,
Cameras/Sensors	As required
Azimuth	Nx 360°
Elevation	-20° to 60°
Stabilization level	1 mrad
Weight without weapons	120 kg